

PURE

Jongo

A2



ENGLISH

FRANÇAIS


ESPAÑOL

1 Get Connected

Download the free Pure Connect app to immerse yourself in music.

Download the free Pure Connect app on your iOS or Android device, and connect your Jongo to a world of music.

Pure Connect lets you stream your own music collection, gives you access to over 20,000 live radio stations from around the world, podcasts and a library of over 200,000 on-demand programs.

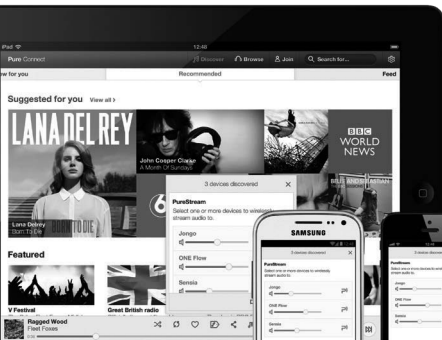

from the
Apple App Store




from
Google Play




EN

2 Setting up your first Jongo?

- Connect Jongo to your hi-fi or microsystem.
- Insert the connector of the AC power adapter into the socket on the rear of Jongo and plug in to the AC power supply.
- If you have already set up your first Jongo, jump to step ⑦.




When the Power light turns solid green, press the **Wi-Fi** button on the base of Jongo.



Wait a few seconds for the Power light to flash amber.

3 Search for Jongo

- On your mobile device search for available Wi-Fi networks.
- Your Jongo will be listed as a network.
- Connect to this network.

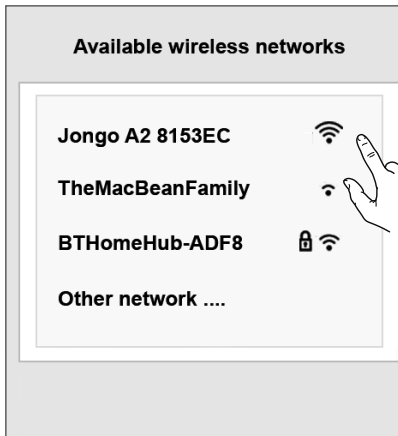

Address: myjongo



GO

Search:

PURE

Jongo A2

Get the Pure Connect app from the Apple App Store (iOS) or Google Play (Android) to stream music and radio to your Jongo A2. Just connect Jongo A2 to your home network and away you go....

Your Jongo's name: Jongo A2 7FD63A

Change name



Software version: v1.0 (4.133.1.8.007)

Current network: None

Available networks:

TheMacBeanFamily

BTHomeHub-ADF8

OrangeB6D8E1



Advanced

Enter your password and press connect

Network password:

Connect



Clear all network settings

4 Add Jongo to your wireless network

- (A) The Jongo Setup page should open automatically on your device. If not, open your internet browser and enter **myjongo** in the address bar.
- (B) If you want to rename your Jongo, type in the new name and tap **Change name**.
- (C) Select your wireless network.
- (D) Enter your network password if required and tap **Connect**.

Once you tap **Connect** the light will pulse and then turn solid green to show that your Jongo is connected.




If the connection fails, the light will flash red. Don't worry, this probably means you mistyped your Wi-Fi password. Just go back to step 2 and try again.



If the problem persists visit **support.pure.com/us**

Choosing your audio connection

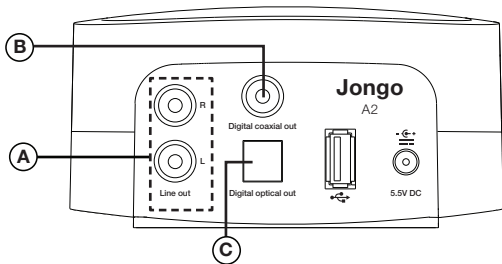

A Analogue audio

Connect to 3.5mm input of any audio product, or to analogue inputs on an amplifier, receiver, TV or monitor.


B Digital coaxial out

Connect to digital coaxial (S/PDIF) input on an amplifier or receiver.

C Digital optical out

Connect to digital optical (S/PDIF) input on an amplifier or receiver.

Jongo A2 Safety Instructions

1. Read these instructions – All the safety and operating instructions should be read before this product is operated.
2. Keep these instructions – The safety and operating instructions should be retained for future reference.
3. Heed all warnings – All warnings on the appliance and in the operating instructions should be adhered to.
4. Follow all instructions – All operating and use instructions should be followed.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
9. Only use attachments/accessories specified by the manufacturer.
10. Unplug the apparatus during lightning storms or when unused for long periods of time.
11. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
12. WARNING Please refer to the information on the bottom exterior of the enclosure for electrical and safety information before installing or operating the apparatus.
13. WARNING To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.
14. WARNING: The direct plug-in adapter is used as disconnect device, the disconnect device shall remain readily operable.
15. Use only power supplies listed in the user instructions (with model no. KSAA0550100W1UV-1, manufactured by Pure).
16.  This equipment is a Class II or double insulated electrical appliance. It has been designed in such a way that it does not require a safety connection to electrical earth.

Approvals



CE marked. Hereby, Pure, declares that this Band II LPD device is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The Declaration of Conformity may be consulted at: <http://www.pure.com/R&TTE-DoC>.
Australian C-Tick N1600 and Electrical Safety.

Acknowledgement of License Agreements

Portions of the code used in Jongo A2 are subject to the GPL, LPGL, BSD, and other open source licenses. For more details please refer to: <http://www.pure.com/licensing>

Warranty information

Imagination Technologies Limited warrants to the end user that this product will be free from defects in materials and workmanship in the course of normal use for a period of two years from the date of purchase. This guarantee covers breakdowns due to manufacturing or design faults; it does not apply in cases such as accidental damage, however caused, wear and tear, negligence, adjustment, modification or repair not authorised by us. Should you have a problem with your unit please contact your supplier or contact Pure Support at: <http://support.pure.com/us>.

Disclaimer

Imagination Technologies Limited makes no representation or warranties with respect to the content of this document and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, Imagination Technologies Limited reserves the right to revise this publication and to make changes in it from time to time without obligation of Imagination Technologies Limited to notify any person or organization of such revisions or changes.

Trademarks

Jongo, Pure, the Pure logo, Imagination Technologies and the Imagination Technologies logo are trademarks or registered trademarks of Imagination Technologies Limited.

Copyright

Copyright © 2013 Imagination Technologies Limited. All rights reserved. No part of this publication may be copied or distributed, transmitted, transcribed, stored in a retrieval system, or translated into any human or computer language, in any form or by any means, electronic, mechanical, magnetic, manual or otherwise, or disclosed to third parties without the express written permission of Imagination Technologies Limited. Version 1 August 2013.

FCC NOTICE TO A USER IN THE UNITED STATES

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.

IC NOTICE TO A USER IN CANADA

Since digital circuitry may cause interference to other radio or television tuners nearby, switch this unit off when not in use or move it away from the affected radio/television tuner.


NOTE: This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus as set out in the Radio Interference Regulations of Industry Canada. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television operation (which can be determined by turning the equipment off), the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

5

Open the Pure Connect App and select the music you want to listen to.

You can choose from Pure Music*, live radio, on-demand content, ambient sounds and the music stored on your device.

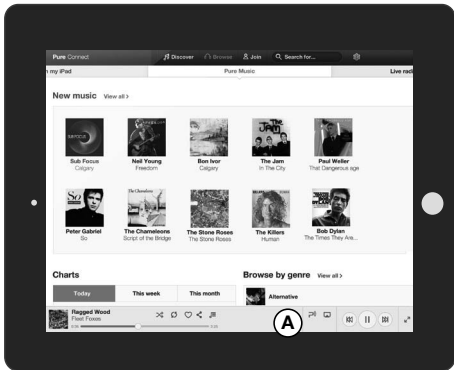


A After selecting the content that you want to listen to, the player bar will appear at the bottom of the screen.

*Pure Music is only available in certain countries. Please see <http://www.pure.com/availability/> for details.

6 Start streaming!

To stream to your Jongo:

- (A) Tap **P** in the player bar to view a list of available Jongo devices on your network.
- (B) Tap **P** next to your Jongo.

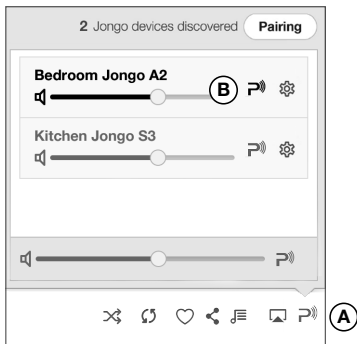

Congratulations!

You're all set up. Enjoy your music.

7

Adding another Jongo to your network?

1. Switch on your new Jongo.
2. Press and hold the **Wi-Fi** button on any Jongo that is already connected to your network until the Power light pulses green.
3. Press and hold the **Wi-Fi** button on the base of the new Jongo until the Power light pulses green.

After around 30 seconds, the Power lights on both Jongs will light steady green to confirm that the new Jongo is connected to your network.

Need more help?

Watch our Jongo setup video at:

www.pure.com/jongo-setup-video




Download the full user guide at: **support.pure.com/us**

Using Bluetooth

1. Enable the Bluetooth option on your mobile device and search for Bluetooth devices.
2. Pair.
If your device requires a key enter "0000".

Choosing your audio connection

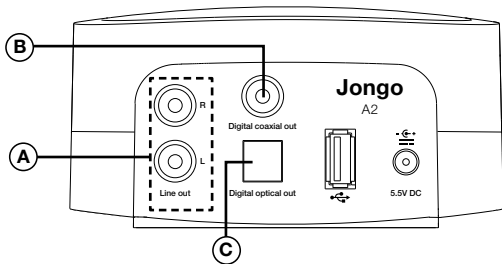

A Analogue audio

Connect to 3.5mm input of any audio product, or to analogue inputs on an amplifier, receiver, TV or monitor.


B Digital coaxial out

Connect to digital coaxial (S/PDIF) input on an amplifier or receiver.

C Digital optical out

Connect to digital optical (S/PDIF) input on an amplifier or receiver.

Jongo A2 Safety Instructions

1. Read these instructions – All the safety and operating instructions should be read before this product is operated.
2. Keep these instructions – The safety and operating instructions should be retained for future reference.
3. Heed all warnings – All warnings on the appliance and in the operating instructions should be adhered to.
4. Follow all instructions – All operating and use instructions should be followed.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
9. Only use attachments/accessories specified by the manufacturer.
10. Unplug the apparatus during lightning storms or when unused for long periods of time.
11. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
12. **WARNING** Please refer to the information on the bottom exterior of the enclosure for electrical and safety information before installing or operating the apparatus.
13. **WARNING** To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.
14. **WARNING:** The direct plug-in adapter is used as disconnect device, the disconnect device shall remain readily operable.
15. Use only power supplies listed in the user instructions (with model no. KSAA0550100W1UV-1, manufactured by Pure).
16.  This equipment is a Class II or double insulated electrical appliance. It has been designed in such a way that it does not require a safety connection to electrical earth.

Approvals



CE marked. Hereby, Pure, declares that this Band II LPD device is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The Declaration of Conformity may be consulted at: <http://www.pure.com/R&TTE-DoC>.
Australian C-Tick N1600 and Electrical Safety.

Acknowledgement of License Agreements

Portions of the code used in Jongo A2 are subject to the GPL, LPGL, BSD, and other open source licenses. For more details please refer to: <http://www.pure.com/licensing>

Warranty information

Imagination Technologies Limited warrants to the end user that this product will be free from defects in materials and workmanship in the course of normal use for a period of two years from the date of purchase. This guarantee covers breakdowns due to manufacturing or design faults; it does not apply in cases such as accidental damage, however caused, wear and tear, negligence, adjustment, modification or repair not authorised by us. Should you have a problem with your unit please contact your supplier or contact Pure Support at: <http://support.pure.com/us>.

Disclaimer

Imagination Technologies Limited makes no representation or warranties with respect to the content of this document and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, Imagination Technologies Limited reserves the right to revise this publication and to make changes in it from time to time without obligation of Imagination Technologies Limited to notify any person or organization of such revisions or changes.

Trademarks

Jongo, Pure, the Pure logo, Imagination Technologies and the Imagination Technologies logo are trademarks or registered trademarks of Imagination Technologies Limited.

Copyright

Copyright © 2013 Imagination Technologies Limited. All rights reserved. No part of this publication may be copied or distributed, transmitted, transcribed, stored in a retrieval system, or translated into any human or computer language, in any form or by any means, electronic, mechanical, magnetic, manual or otherwise, or disclosed to third parties without the express written permission of Imagination Technologies Limited. Version 1 August 2013.

FCC NOTICE TO A USER IN THE UNITED STATES

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.

IC NOTICE TO A USER IN CANADA

Since digital circuitry may cause interference to other radio or television tuners nearby, switch this unit off when not in use or move it away from the affected radio/television tuner.


NOTE: This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus as set out in the Radio Interference Regulations of Industry Canada. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television operation (which can be determined by turning the equipment off), the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

1 Connectez-vous !

Téléchargez l'application gratuite Pure Connect pour plonger dans le monde de la musique.

Téléchargez l'application gratuite Pure Connect sur votre périphérique mobile sous iOS ou Android, puis connectez-y votre Jongo pour accéder à un univers musical incroyablement riche. Pure Connect vous permet de diffuser l'intégralité de votre collection musicale, mais aussi d'accéder à plus de 20 000 stations de radio du monde entier, ainsi qu'à d'innombrables podcasts et à une bibliothèque de plus de 200 000 programmes.

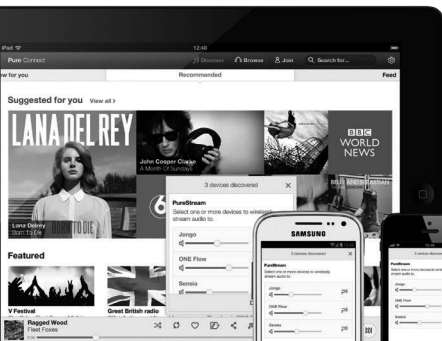

à partir de
l'Apple App Store




à partir de
Google Play




FR

2 Configuration de votre premier Jongo

- Reliez votre Jongo à votre chaîne ou micro-chaîne Hi-Fi.
- Insérez le connecteur de l'adaptateur secteur dans le port d'alimentation situé à l'arrière du Jongo et branchez-le à l'alimentation.
- Si vous avez déjà configuré votre premier Jongo, passez à l'étape ⑦.




Lorsque le témoin d'alimentation est vert en continu, appuyez sur le bouton **Wi-Fi** situé à la base.



Patiencez quelques secondes jusqu'à ce que le témoin d'alimentation clignote en orange.

3 Recherche de votre Jongo

- Recherchez les réseaux Wi-Fi disponibles sur votre appareil mobile.
- Votre Jongo sera répertorié comme un réseau.
- Connectez-vous à ce réseau.

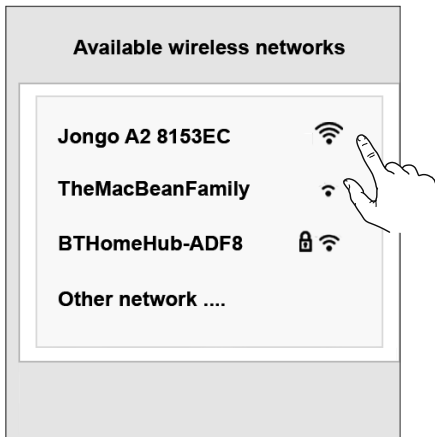

Address: myjongo



GO

Search:

PURE

Jongo A2

Get the Pure Connect app from the Apple App Store (iOS) or Google Play (Android) to stream music and radio to your Jongo A2. Just connect Jongo A2 to your home network and away you go....

Your Jongo's name: Jongo A2 7FD63A

Change name



Software version: v1.0 (4.133.1.8.007)

Current network: None

Available networks:

TheMacBeanFamily

BTHomeHub-ADF8

OrangeB6D8E1



Advanced

Enter your password and press connect

Network password:

Connect



Clear all network settings

4

Ajout du Jongo à votre réseau sans fil

- (A) La page Jongo Setup (Configuration de Jongo) doit s'ouvrir automatiquement sur votre appareil. Si tel n'est pas le cas, ouvrez votre navigateur Internet et saisissez **myjongo** dans la barre d'adresse.
- (B) Pour renommer votre Jongo, saisissez son nouveau nom, puis appuyez sur **Change name (Changer le nom)**.
- (C) Sélectionnez votre réseau sans fil.
- (D) Saisissez votre mot de passe réseau, le cas échéant, puis appuyez sur **Connect (Connexion)**.

Une fois que vous appuyez sur **Connect (Connexion)**, le témoin clignote et devient vert en continu pour indiquer que votre Jongo est connecté.



En cas d'échec de connexion, le témoin clignote en rouge. Pas d'inquiétude, il s'agit sans doute d'une erreur de saisie de votre mot de passe Wi-Fi. Revenez à l'étape 2 et réessayez.




Si le problème persiste, consultez la page:
support.pure.com.

5

Ouverture de l'application Pure Connect et choix de la musique.

Vous avez le choix entre Pure Music*, la radio, le contenu à la demande, les ambiances sonores et la musique stockée sur votre appareil.

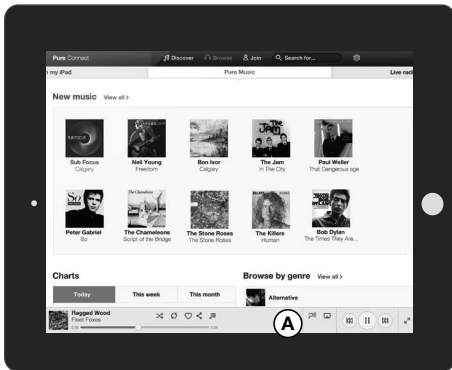


A Après avoir sélectionné le contenu que vous souhaitez écouter, la barre du lecteur apparaîtra au bas de la fenêtre.

*Pure Music est uniquement disponible dans certains pays. Veuillez visiter: <http://www.pure.com/availability/> pour plus de détails.

6 Commencez à diffuser !

Pour diffuser en streaming sur votre Jongo :

- (A) Appuyez sur **P** dans la barre du lecteur pour afficher une liste des appareils Jongo disponibles sur votre réseau.
- (B) Appuyez sur **P** en regard de votre Jongo.

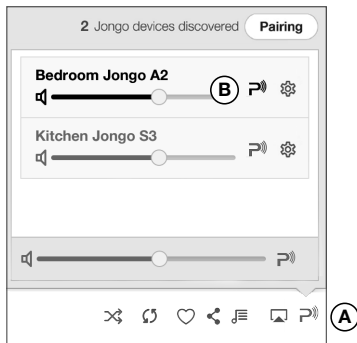

Félicitations !

La configuration est terminée. Profitez de votre musique.

7

Ajout d'un autre Jongo à votre réseau sans fil

1. Allumez votre nouveau Jongo.
2. Maintenez enfoncé le bouton **Wi-Fi**-du Jongo qui est déjà connecté à votre réseau jusqu'à ce que le témoin d'alimentation clignote en vert.
3. Maintenez enfoncé le bouton **Wi-Fi** situé à l'arrière du nouveau Jongo jusqu'à ce que le témoin d'alimentation clignote en vert.

Après environ 30 secondes, les témoins d'alimentation des deux Jongsos s'allumeront en vert en continu pour confirmer la connexion du nouveau Jongo à votre réseau.

Besoin d'aide supplémentaire ?

Regardez notre vidéo de configuration du Jongo à l'adresse :
www.pure.com/jongo-setup-video




Téléchargez le guide utilisateur complet à l'adresse :
support.pure.com

Utilisation de la connexion Bluetooth

1. Activez l'option Bluetooth sur votre périphérique mobile et recherchez les appareils Bluetooth.
2. Associez.
Si votre appareil requiert une clé, saisissez «0000 ».

Connectique et commandes du panneau arrière

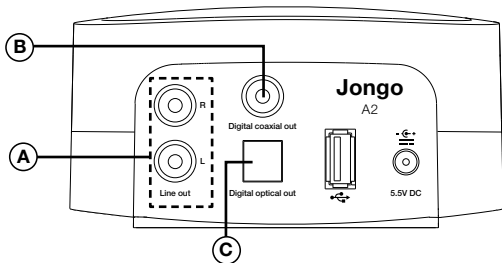

(A) Sorties audio analogiques

À relier à l'entrée format mini-jack de tout produit audio, ou aux entrées analogiques format RCA d'un amplificateur, d'un récepteur, d'une TV ou d'un moniteur.


(B) Sortie numérique coaxiale

À relier à l'entrée numérique coaxiale (S/PDIF) d'un amplificateur ou d'un récepteur.

(C) Sortie numérique optique

À relier à l'entrée numérique optique (S/PDIF) d'un amplificateur ou d'un récepteur.

Instructions de sécurité relatives au Jongo A2

1. Veuillez lire les présentes instructions – vous devez lire toutes les instructions de sécurité et d'utilisation avant d'utiliser cet appareil.
2. Veuillez conserver les présentes instructions – vous devez conserver les instructions de sécurité et d'utilisation en lieu sûr pour toute référence ultérieure.
3. Veuillez respecter tous les avertissements – vous devez respecter tous les avertissements figurant sur l'appareil ou dans le mode d'emploi.
4. Veuillez suivre toutes les instructions – vous devez suivre toutes les instructions d'utilisation.
5. N'utilisez pas cet appareil à proximité d'un point d'eau.
6. Nettoyez l'appareil uniquement avec un chiffon sec.
7. Les orifices d'aération ne doivent pas être obstrués. Installez l'appareil conformément aux instructions du fabricant.
8. N'installez pas l'appareil à proximité de sources de chaleur, telles que les radiateurs, bouches de diffusion d'air chaud, poêles, ou tout autre appareil produisant de la chaleur.
9. N'utilisez que des fixations/accessoires spécifiés par le fabricant.
10. Débranchez l'appareil en cas d'orages ou avant toute inutilisation prolongée.
11. Faites exécuter toutes les tâches de service après-vente par des techniciens qualifiés. Contactez ce service lorsque l'appareil a été endommagé (cordon d'alimentation ou prise, par exemple), qu'il ne fonctionne pas normalement ou qu'il est tombé.
12. **AVERTISSEMENT** Veuillez lire les informations indiquées en-dessous de l'appareil concernant les branchements électriques et la sécurité avant d'installer ou de mettre l'appareil en marche.
13. **AVERTISSEMENT** Afin de réduire le risque d'incendie ou de choc électrique, n'exposez pas l'appareil à la pluie ni à l'humidité. N'exposez pas cet appareil à des éclaboussements ni à des gouttes d'eau ; ne placez aucun objet contenant du liquide (tel qu'un vase) sur l'appareil.
14. **AVERTISSEMENT** : l'adaptateur directement enfichable est utilisé comme appareil de sectionnement l'appareil de sectionnement doit être prêt à fonctionner à tout moment.
15. Utilisez cet appareil uniquement sur des tensions secteur conformes à celles spécifiées dans le guide de l'utilisateur (en utilisant la référence KSAA0550100W1UV-1, fabriquée par Pure).
16.  Cet appareil est de classe 2 ou dispose d'un équipement à double isolation électrique. Il a été conçu de sorte à ne requérir aucune connexion de sécurité pour la mise à la terre.

Homologations



Certifié CE. Pure déclare par la présente que cet appareil LPD bande II est conforme aux exigences essentielles et autres dispositions applicables de la directive 1999/5/CE. La déclaration de conformité est consultable à cette adresse : <http://www.pure.com/R&TTE-DoC>.

Marquage C-Tick et de sécurité électrique pour l'Australie.

Déclaration des accords de licence

Des parties du code utilisé dans Jongo A2 sont soumises à des licences GPL, LPGL, BSD et d'autres licences open source. Pour plus de détails, veuillez consulter la page : <http://www.pure.com/licensing>

Informations sur la garantie

Imagination Technologies Limited garantit à l'utilisateur final que le présent produit est exempt de défauts de matière et de main-d'œuvre dans le cadre d'une utilisation normale, pour une période de deux ans à compter de la date d'achat. La présente garantie couvre les pannes dues à un défaut de conception ou de fabrication ; elle n'est pas applicable aux dommages accidentels, quelle qu'en soit la cause, à l'usure normale du produit, ainsi qu'à tous les dommages dus à la négligence et aux interventions, modifications ou réparations effectuées sans notre autorisation. Si vous rencontrez un problème avec votre appareil, veuillez contacter votre fournisseur ou l'assistance technique de Pure à l'adresse <http://support.pure.com>.

Avis de non-responsabilité

Imagination Technologies Limited décline toute responsabilité et n'accorde aucune garantie quant au contenu du présent document, notamment en ce qui concerne les garanties implicites de valeur marchande ou d'adéquation à un usage spécifique. En outre, Imagination Technologies Limited se réserve le droit de réviser la présente publication et d'y apporter des modifications, quand elle le souhaite, sans obligation de sa part d'aviser les personnes physiques ou morales desdites révisions ou modifications.

Marques déposées

Jongo, Pure, le logo Pure, Imagination Technologies et le logo Imagination Technologies sont des marques ou des marques déposées d'Imagination Technologies Limited.


Copyright

© 2013 Imagination Technologies Limited. Tous droits réservés. Aucune partie de cette publication ne peut être copiée, distribuée, transmise, transcrite, stockée dans un système de restauration ou traduite dans un langage humain ou informatique, en tout ou partie, sous quelque forme et par quelque procédé que ce soit, électronique, mécanique, magnétique, manuel ou autre, ni divulguée à des tiers, sans le consentement écrit préalable d'Imagination Technologies Limited. Version 1 - Juin 2013.

1 Conéctese

Descargue la aplicación gratuita Pure Connect para rodearse de música.

Descargue la aplicación gratuita Pure Connect en su dispositivo Android o iOS y conecte su Jongo a todo un mundo de música. Pure Connect le permite reproducir su propia colección de música; también le brinda acceso a más de 20 000 emisoras de radio en directo de todo el mundo, a podcasts y a una biblioteca de más de 200 000 programas.

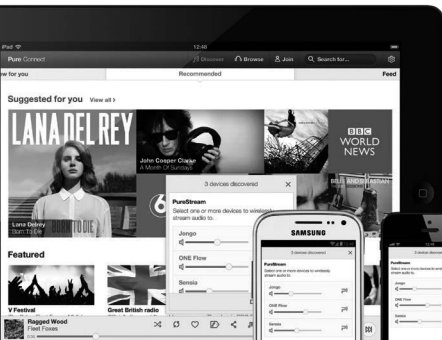

desde el App Store
de Apple




desde
Google Play




2 ¿Va a configurar su primer Jongo?

- Conecte Jongo a su microsistema o equipo Hi-Fi.
- Introduzca el conector del adaptador de corriente eléctrica en la toma situada en la parte posterior de Jongo y conéctelo a la red eléctrica.
- Si ya lo ha hecho, vaya al paso ⑦.




Cuando la luz de encendido se ponga en verde, oprima el botón **Wi-Fi** situado en la parte trasera.



Espere unos segundos hasta que la luz de encendido parpadee en color ámbar.

3 Busque Jongo

- Busque las redes Wi-Fi disponibles en su dispositivo móvil.
- Jongo aparecerá en su lista de redes.
- Conéctese a esta red.

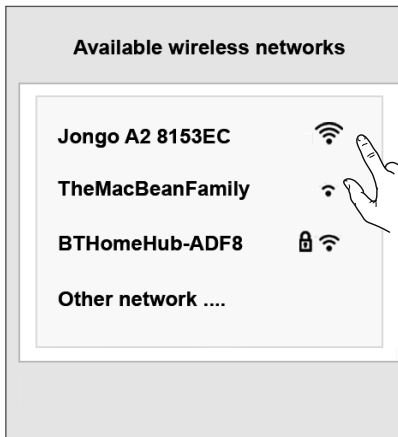

Address: myjongo



GO

Search:

PURE

Jongo A2

Get the Pure Connect app from the Apple App Store (iOS) or Google Play (Android) to stream music and radio to your Jongo A2. Just connect Jongo A2 to your home network and away you go....

Your Jongo's name: Jongo A2 7FD63A

Change name



Software version: v1.0 (4.133.1.8.007)

Current network: None

Available networks:

TheMacBeanFamily

BTHomeHub-ADF8

OrangeB6D8E1



Advanced

Enter your password and press connect

Network password:

Connect



Clear all network settings

4

Añada Jongo a su red inalámbrica

- (A) La página de configuración de Jongo se abrirá automáticamente en su dispositivo. De lo contrario, abra su navegador web e introduzca **myjongo** en la barra de direcciones.
- (B) Si desea cambiar el nombre de su Jongo, introduzca el nuevo nombre y oprima **Change name (Cambiar nombre)**.
- (C) Seleccione su red inalámbrica.
- (D) Introduzca la contraseña de red si se le indica y oprima **Connect (Conectar)**.

Cuando oprima **Connect (Conectar)**, la luz parpadeará y se encenderá en verde, lo que indicará que Jongo está conectado.



Si no se produce la conexión, la luz parpadeará en rojo. No se preocupe, probablemente se deba a que introdujo mal la contraseña de su Wi-Fi. Regrese al paso 2 y repita el proceso.




Si el problema persiste, visite **support.pure.com**

5

Abra la aplicación Pure Connect y seleccione la música que quiera escuchar.

Puede elegir entre Pure Music*, radio en directo, contenido a la carta, sonidos ambientales y la música almacenada en su dispositivo.

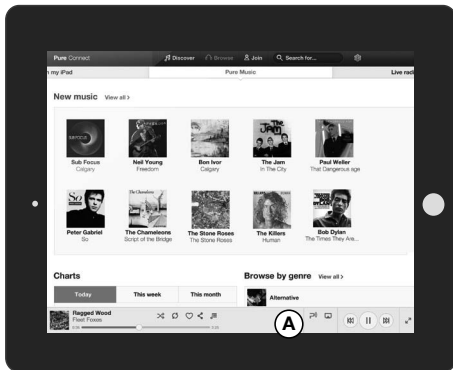


- A** Una vez seleccionado el contenido que desea escuchar, la barra del reproductor aparecerá en la parte inferior de la ventana.

*Pure Music solo está disponible en algunos países. Consulte:
<http://www.pure.com/availability/> para obtener información adicional.

6 Comience la transmisión

Para establecer la transmisión hacia Jongo:

- (A) Oprima **P** en la barra del reproductor para ver una lista de los dispositivos Jongo disponibles en su red.
- (B) Oprima **P** al lado de su Jongo.

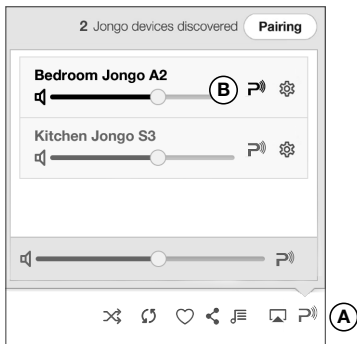

¡Felicidades!

Ya está listo. Disfrute de su música.

7

¿Desea añadir otro Jongo a su red?

1. Encienda el nuevo Jongo.
2. Mantenga oprimido el botón **Wi-Fi** en cualquier Jongo que ya esté conectado a su red hasta que la luz de encendido parpadee en verde.
3. Mantenga oprimido el botón **Wi-Fi** en la parte posterior del nuevo Jongo hasta que la luz de encendido parpadee en verde.

Transcurridos unos 30 segundos, las luces de encendido de ambos dispositivos Jongo permanecerán prendidas en verde como confirmación de que el nuevo Jongo está conectado a su red.

¿Necesita más ayuda?

Vea nuestra configuración de Jongo en:

www.pure.com/jongo-setup-video




Descargue la guía del usuario completa en: **support.pure.com**

Utilización de Bluetooth

1. Habilite la opción Bluetooth en su dispositivo móvil y busque dispositivos Bluetooth.
2. Proceda con la comunicación.
Si su dispositivo le pide una clave, introduzca "0000".

Controles y conectores del panel trasero

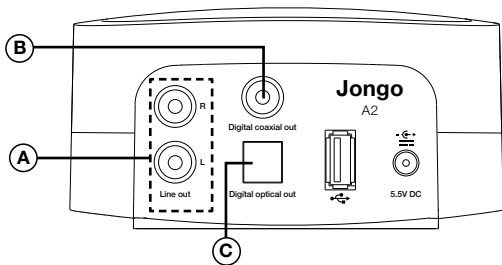

A Audio analógico

Conexión a la entrada de 3,5 mm de cualquier producto de audio o a entradas analógicas de un amplificador, receptor, televisor o monitor.


B Salida digital coaxial

Conexión a la entrada digital coaxial (S/PDIF) de un amplificador o receptor.

C Salida digital óptica

Conexión a la entrada digital óptica (S/PDIF) de un amplificador o receptor.

Instrucciones de seguridad de Jongo A2

1. Lea estas instrucciones. Antes de utilizar este producto se deben leer todas las instrucciones de seguridad y de funcionamiento.
2. Conserve estas instrucciones. Conserve las instrucciones de seguridad y de funcionamiento para consultarlas más adelante.
3. Respete todas las advertencias. Siga todas las advertencias que figuran en el aparato y en las instrucciones de funcionamiento.
4. Siga todas las instrucciones. Se deben seguir todas las instrucciones de funcionamiento y de uso.
5. No utilice este aparato cerca del agua.
6. Limpie sólo con un trapo seco.
7. No bloquee ninguna de las aberturas de ventilación. Instale el aparato conforme a las instrucciones del fabricante.
8. No instale el aparato cerca de fuentes de calor como radiadores, rejillas de ventilación, estufas u otros aparatos que produzcan calor.
9. Use sólo los aparatos adicionales/accesorios especificados por el fabricante.
10. Desconecte el aparato cuando haya tormentas eléctricas o si no lo va a utilizar durante un período de tiempo prolongado.
11. Acuda a personal de servicio cualificado para realizar cualquier reparación. Es necesario realizar reparaciones si el aparato ha sufrido algún daño como, por ejemplo, que el cable o el conector de alimentación eléctrica esté dañado, se haya derramado algún líquido o si han caído objetos en el aparato, o bien si el aparato ha estado expuesto a la lluvia o a la humedad, si no funciona normalmente o si ha sufrido una caída.
12. ADVERTENCIA: Consulte la información eléctrica y de seguridad en la parte inferior externa de la carcasa antes de instalar o poner en funcionamiento el aparato.
13. ADVERTENCIA: Para reducir el riesgo de incendio o de descarga eléctrica, no exponga este aparato a la lluvia ni a fuentes de humedad. No exponga el aparato a fuentes de goteo o de salpicaduras. Asimismo, no coloque encima del aparato ningún recipiente que contenga líquido como, por ejemplo, un jarrón.
14. ADVERTENCIA: Si el adaptador de conexión directa se usa como dispositivo de desconexión, este seguirá estando operativo.
15. Utilice únicamente las fuentes de alimentación que se indican en las instrucciones del usuario (con el n.º de modelo KSAA0550100W1UV-1, fabricado por Pure).
16.  El equipo es un aparato eléctrico Clase II, o con doble aislamiento. Está diseñado de tal modo que no requiere una conexión de seguridad a la masa eléctrica.

Homologaciones



Certificado CE. Por la presente, Pure declara que este dispositivo de baja potencia (LPD, por sus siglas en inglés) y Banda II cumple los requisitos esenciales y otras disposiciones pertinentes de la Directiva 1999/5/CE.

La declaración de conformidad puede consultarse en:

<http://www.pure.com/R&TTE-DoC>.

Norma C-Tick N1600 australiana y de seguridad eléctrica.

Confirmación de los contratos de licencias

Determinadas partes del código usado en Jongo A2 están sujetas a licencias GPL, LPGL, BSD y a otras licencias de código abierto. Si desea obtener información adicional, consulte la información en: <http://www.pure.com/licensing>

Información de la garantía

Imagination Technologies Ltd. garantiza al usuario final que este producto no presentará defectos de materiales ni de fabricación durante una utilización normal en un periodo de dos años a partir de la fecha de compra. Esta garantía cubre descomposturas debido a fallas de fabricación o de diseño; No aplica en casos como daño accidental, sin importar su causa, desgaste, negligencia, ajuste, modificación o reparación que no hayan sido autorizados por nosotros. Si tiene cualquier problema con el producto, póngase en contacto con su distribuidor o con el soporte técnico de Pure en: <http://support.pure.com>.

Exención de responsabilidad

Imagination Technologies Limited no ofrece declaraciones ni garantías con respecto al contenido de este documento, y rechaza de manera específica toda garantía implícita de comercialización o adecuación para cualquier propósito específico. Además, Imagination Technologies Limited se reserva el derecho de revisar esta publicación y realizar cambios en ella de vez en cuando, sin tener la obligación de notificar sobre estos cambios a ninguna persona u organización.

Marcas registradas

Jongo, Pure, el logotipo de Pure, Imagination Technologies y el logotipo de Imagination Technologies son marcas comerciales o marcas comerciales registradas de Imagination Technologies Limited.

Copyright

Copyright © 2013 Imagination Technologies Limited. Todos los derechos reservados. Ninguna parte de esta publicación puede copiarse o distribuirse, transmitirse, transcribirse, almacenarse en un sistema de recuperación, ni traducirse en cualquier lenguaje humano o de computadora, en cualquier forma o por cualquier medio, ya sea electrónico, mecánico, magnético, manual o de otra clase, o revelado a terceras partes sin el permiso expreso por escrito de Imagination Technologies Limited. Versión del 1 de junio de 2013.

PURE

www.pure.com
connect.pure.com

Pure North America

Imagination Technologies
955 East Arques Avenue
Sunnyvale, CA 94085
USA
www.pure.com/us
<http://support.pure.com/us>

Pure UK Headquarters

Imagination Technologies Limited
Home Park Estate
Kings Langley
Herts, WD4 8LZ
United Kingdom
www.pure.com
<http://support.pure.com>